

MAGIC CLOUD CEILING



SYSTEMS DESCRIPTIONS



The panels had holes in order to be fixed on the existing by screws. The screws were covered by finish profile which could be of any material and design, laminated with Backlight's iron plate and positioned magnetically on the seams of lighting panels.



The panels were supported from the bottom by fixing OMEGA PROFILES - by general contractor or Backlight under request - to the existing. The finish frame was magnetic.

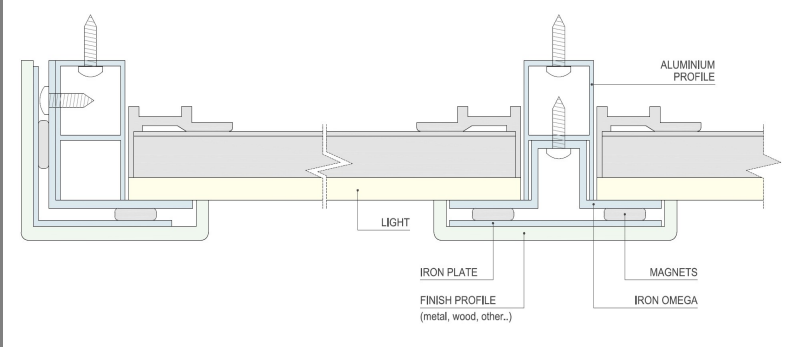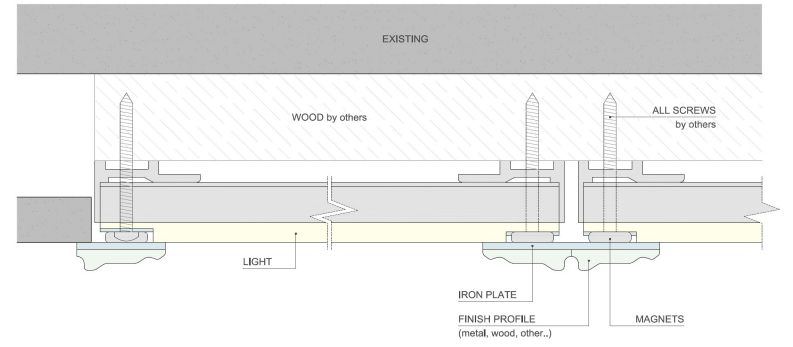

PRODUCT SPECIFICATIONS

INPUT	24 VDC	INPUT	24 VDC
KELVIN	3500K	KELVIN	3500K
CRI	>95	CRI	>95
DIMMING	1-10V	DIMMING	LUTRON
WATTAGE	28W line/mt - 9 line/ft	WATTAGE	28W line/mt - 9 line/ft
LUMENS	High bright 570 lm per linear ft (1632 lm per linear mt) of longer side	LUMENS	High bright 570 lm per linear ft (1632 lm per linear mt) of longer side
LENGHT	1200 mm - 47.2 In	LENGHT	3000 mm - 118.11 In
WIDTH	1200 mm - 47.2 In	WIDTH	1250 mm - 49.2 In
WEIGHT	25 Kg/sq. Mt - 5.7 lbs / sq. ft	WEIGHT	25 Kg/sq. Mt - 5.7 lbs / sq.
THICKNESS	28.0 mm - 1.1 in (panel+system)	THICKNESS	28.0 mm - 1.1 in (panel+system)
CABLE OPTION B		CABLE OPTION B	
IP GRADE	IP40	P GRADE	IP40
WET LOCATION	DAMP LOCATION (ON REQUEST)	WET LOCATION	DAMP LOCATION (ON REQUEST)
CERTIFICATIONS	CE - EAC -cULus - Rohs	CERTIFICATIONS	CE - EAC -cULus - Rohs
	Storage Area of Clothes Closet		Storage Area of Clothes Closet