

MAGIC CLOUD SUSPENDED



SYSTEMS DESCRIPTIONS



These panels have a hole to let the system cord to pass through. Magnets were integrated on the light surface and iron frame (that can be attached to another finish frame by other shape or material)



The panels are supported from the bottom by 3 mm NOTCHES and suspended by Steel Cords hanged on the existing. In case of more modules, the space needed between them is at least 1 cm (0.4 In) in order to get a clean result along the seams.

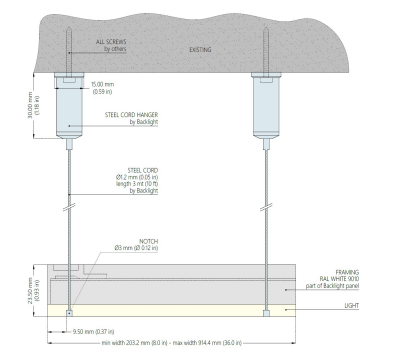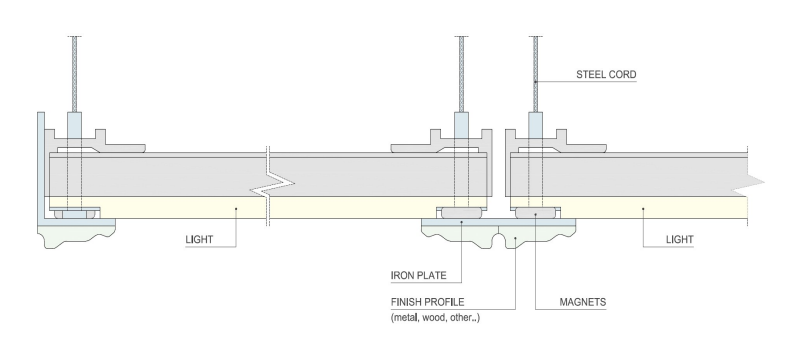

PRODUCT SPECIFICATIONS

INPUT	24 VDC	INPUT	24 VDC
KELVIN	3200K	KELVIN	Tunable white (2700K-6500K)
CRI	>95	CRI	>95
DIMMING	1-10V	DIMMING	DMX
WATTAGE	28W line/mt - 9 line/ft	WATTAGE	28W line/mt - 9 line/ft
LUMENS	High bright 570 lm per linear ft (1632 lm per linear mt) of longer side	LUMENS	High bright 570 lm per linear ft (1632 lm per linear mt) of longer side
LENGHT	2000 mm - 78.7 In	LENGHT	970 mm - 38.9 In
WIDTH	600 mm - 23.6 In	WIDTH	970 mm - 38.9 In
WEIGHT	30 Kg/sq. Mt - 66 lbs / sq. ft	WEIGHT	25 Kg/sq. Mt - 5.7 lbs / sq.
THICKNESS	28.0 mm - 1.1 in (panel+system)	THICKNESS	28.0 mm - 1.1 in (panel+system)
CABLE OPTION B		CABLE OPTION B	
IP GRADE	IP40	P GRADE	IP40
WET LOCATION	DAMP LOCATION (ON REQUEST)	WET LOCATION	DAMP LOCATION (ON REQUEST)
CERTIFICATIONS	CE - EAC -cULus - Rohs	CERTIFICATIONS	CE - EAC -cULus - Rohs
	Storage Area of Clothes Closet		Storage Area of Clothes Closet