

# SHELL ASTM / E84 ELEVATORS



## SYSTEMS DESCRIPTIONS



The panel is mounted by FRAME and it is removable by lifting the panel and removing the side screws from the L profile.



The panel is mounted by FRAME and it is removable by lifting the panel and removing the side screws from the L profile.

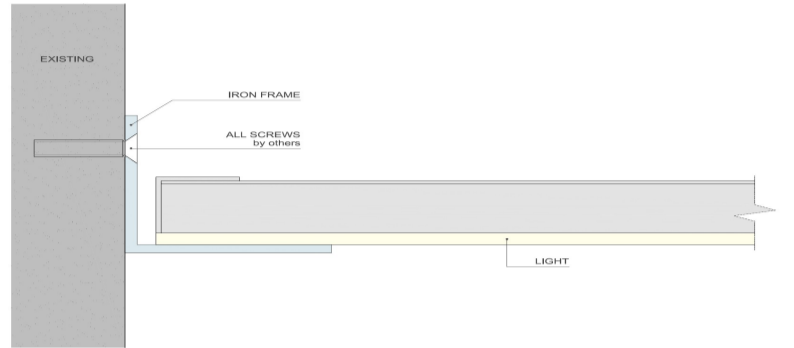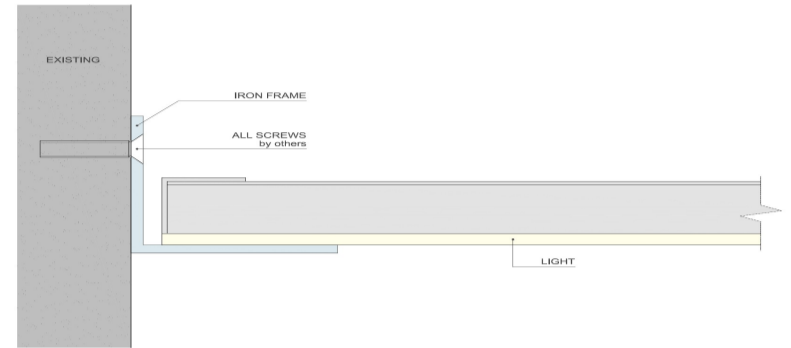

## PRODUCT SPECIFICATIONS

INPUT	24 VDC	INPUT	24 VDC
KELVIN	2700K	KELVIN	4000K
CRI	>95	CRI	>95
DIMMING	1-10V	DIMMING	1-10V
WATTAGE	28W line/mt - 9 line/ft	WATTAGE	14W for each mt of the perimeter
LUMENS	High bright 570 lm per linear ft (1632 lm per linear mt ) of longer side	LUMENS	Standard bright 280 lm per linear ft (890 lm per linear mt ) of longer side
LENGHT	914.4 mm - 36 In	LENGHT	1371.6 mm -54 In
WIDTH	1438.2 mm - 56.6 In	WIDTH	1438.2 mm - 56.6 In
WEIGHT	25 Kg/sq. Mt - 5.7 lbs / sq. ft	WEIGHT	25 Kg/sq. Mt - 5.7 lbs / sq.
THICKNESS	28.0 mm - 1.1 in ( panel+system)	THICKNESS	28.0 mm - 1.1 in ( panel+system)
CABLE OPTION B		CABLE OPTION B	
IP GRADE	IP40	P GRADE	IP40
WET LOCATION	DAMP LOCATION ( ON REQUEST )	WET LOCATION	DAMP LOCATION ( ON REQUEST )
CERTIFICATIONS	CE - EAC -cULus - Rohs	CERTIFICATIONS	CE - EAC -cULus - Rohs
	Storage Area of Clothes Closet		Storage Area of Clothes Closet